



WMA SERIES

UP TO
2,000 LUMEN




SERIES	CCT	LED WATT	FINISH	MOUNTING	DISTRIBUTION	VOLTAGE
WMA	5-5000K	22	BRZ-BRONZE	WALL MOUNT STANDARD	WIDE	120-277
		30				

SPEC DATA

WATTS	CCT	LUMEN	FIXTURE DIMENSION (measurements in inches)	WEIGHT	DLC
22	5000	1400	6.75W X 11H X 5.25D	3	NO
30	5000	2000	6.75W X 11H X 5.25D	3	NO

OPTIONS	
	PEC-120V - PHOTOCELL
	PEC-208V - PHOTOCELL
	PEC-240V - PHOTOCELL
	PEC-277V - PHOTOCELL

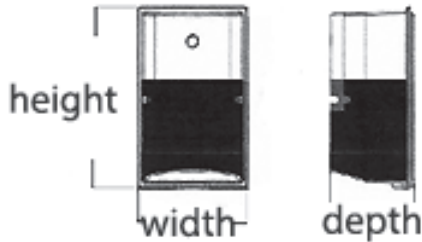

KEY FEATURES & BENEFITS

- Die-Cast Aluminum Back Plate
- Bronze Polycarbonate Housing
- UV Resistant Lens
- High Quality LED's
- UL Listed for Wet Location
- Universal Voltage 120-277 Volt
- 50,000 Hrs. Rated Average Life
- 3 Year Warranty

APPLICATIONS

- Schools and Universities
- Commercial Buildings
- Security Lighting
- Residential Security Lighting
- Entryway Lighting

